



## XRJ102

### Adaptateurs audio RJ45

#### RJ45 Audio Adaptaters

Les adaptateurs XRJ102 ont été conçus pour être utilisés avec le standard international. Ils permettent d'interfacer une liaison stéréo symétrique, ou une liaison AES/EBU sur XLR vers un câble RJ45. Ces adaptateurs offrent une excellente transmission du signal et une fiabilité dans le temps. La longueur de chaque adaptateur est de 20 cm.

#### Exemple d'utilisation :

- Relier une console analogique avec un ampli via un câble RJ45.
- Relier un ampli casque PCS304 sur une sortie Compact ou RP2000.
- Utiliser le câblage RJ45 établi entre deux locaux pour réaliser une liaison audio entre eux.

*The XRJ102 adapters have been designed for use with the international standard. They allow to interface a balanced stereo link, or an AES/EBU link on XLR to an RJ45 cable.*

*These adapters offer excellent signal transmission and reliability over time.*

*The length of each adapter is 20 cm.*

#### Example of use :

- Connect an analog console with an amplifier via an RJ45 cable.
- Connect a PCS304 headphone amplifier to a Compact or RP2000 output.
- Use the RJ45 wiring established between two rooms to make an audio link between them.

Câble Adaptateur RJ45 femelle vers 2 "XLR Mâle"  
(Adaptater cable: RJ45 female to 2 "XLR Male")


**XRJ102M**

Câble Adaptateur RJ45 femelle vers 2 "XLR Femelle"  
(Adaptater cable: RJ45 female to 2 "XLR Female")

**XRJ102F**




## Câblage RJ45 / Wiring RJ45:

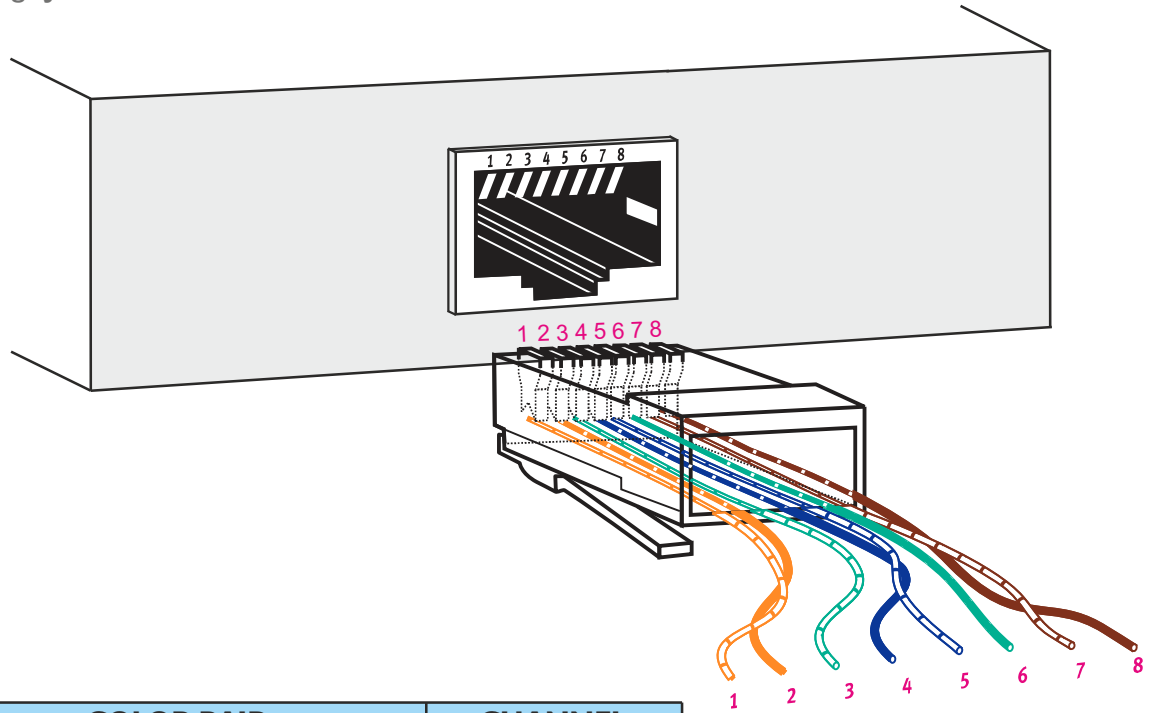



RJ 45 pins	COLOR PAIR		CHANNEL
1		white / orange	L+ / AES+
2		orange	L - / AES -
3		white / green	R +
4		blue	GND
5		white / blue	nc
6		green	R -
7		white / brown	nc
8		brown	nc
Shield		grey	Shield

## Câblage XLR / Wiring XLR:

### XLR Male



### XLR Female

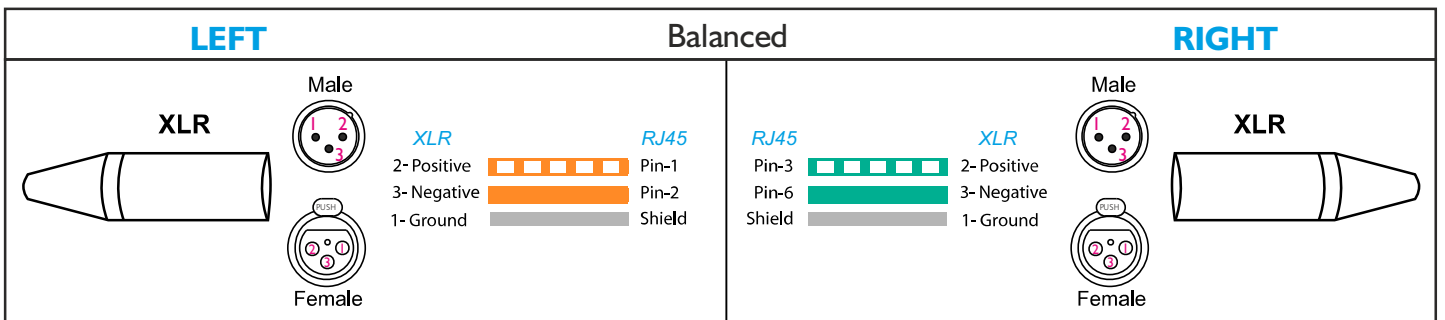

Rami se réserve le droit de modifier les spécifications du produit sans préavis  
All specifications in this document can be modified by RAmi without prior notice.

Vers 1200205